


Prosine 2.5/3.0 Inverter/Chargers

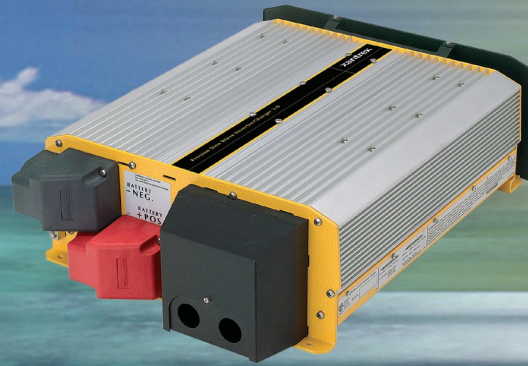

Provides 2500/3000 watts of sine wave AC power from a DC source and multistage battery charging

The Prosine 2.5 and 3.0 inverter/chargers offer a powerful all-in-one solution, delivering unsurpassed clean true sine wave electrical power for all types of appliances along with technologically superior three-stage charging for longer battery life. Offering a revolutionary technology and power to weight ratio, Xantrex Prosine technology is the benchmark for premium integrated power systems.

Prosine 2.5/3.0

- ▶ 2500/3000 watt inverter, 50 A surge capability
- ▶ Power factor corrected multistage charger
- ▶ True sine wave output (crystal controlled)
- ▶ Built-in 30 A transfer switch automatically transfers between inverter power and incoming AC power
- ▶ Equalization mode conditions batteries for longer life
- ▶ Power sharing prevents tripping of shorepower breaker
- ▶ Compact, lightweight, and easy to install
- ▶ Includes remote panel and battery temperature sensor
- ▶ Two year warranty

Protection Features

- ▶ Over voltage and under voltage protection
- ▶ Over temperature protection and automatic overload protection
- ▶ Short circuit AC backfeed protection

Options

- ▶ Available in 12 volt and 24 volt models
- ▶ DC wiring box for residential home installation
- ▶ GFCI-equipped AC wiring box

Prosine 2.5 Remote Panel (Included)

- ▶ Independent inverter and charger on/off controls
- ▶ LED bar graph display of DC volts and amps
- ▶ LED fault diagnostics

Prosine 3.0 (ACS) Remote Panel (Included)

- ▶ Independent inverter and charger on/off controls
- ▶ Push button control of power sharing, equalizing, battery set-up
- ▶ Easy to read backlit digital display
- ▶ Single at-a -glance display of AC and DC system information
- ▶ Text message fault diagnostics



CSA/NRTL certified to UL & CSA standards

Xantrex Technology Inc.

Headquarters
8999 Nelson Way
Burnaby, British Columbia
Canada V5A 4B5
800 670 0707 Toll Free
604 420 1591 Fax

5916 195th Street NE
Arlington, Washington
USA 98223
800 446 6180 Toll Free
360 925 5143 Fax

www.xantrex.com

2500/3000 Watt True Sine Wave

Electrical Specifications - Inverter

Models	Prosine 2.5	Prosine 3.0
Output power (continuous)	2500 watts	3000 watts
Surge rating (5 sec.)	4000 watts	4000 watts
Output current (peak)	50 A	50 A
Output voltage (at no load)	120 VAC +/-3%	120 VAC +/-3%
Output voltage (over full load and battery voltage range)	120 VAC RMS -10% / +4%	120 VAC RMS -10% / +4%
Output frequency	60 Hz +/-0.05% (crystal controlled)	60 Hz +/-0.05% (crystal controlled)
Output waveform	True sine wave <5% THD	True sine wave <5% THD
Peak efficiency	88%	88%
No load current draw (search mode)	<3 W	<3 W
No load current draw (with inverter on)	<60 W	<60 W
Input DC voltage range (12 V/24 V)	10 – 16 VDC / 20 – 32 VDC	10 – 16 VDC / 20 – 32 VDC

Electrical Specifications - Charger

Charger rate (12 V/24 V)	100 A/50 A	120 A/60 A
Output voltage (nom. 12 V/24 V - depending on settings)		
▶ Charge	13.8 – 14.8 VDC / 27.6 – 29.6 VDC	13.8 – 14.8 VDC / 27.6 – 29.6 VDC
▶ Float	13.1 – 14.2 VDC / 26.2 – 28.4 VDC	13.1 – 14.2 VDC / 26.2 – 28.4 VDC
▶ Equalize	14.0 – 18.0 VDC / 28.0 – 26.0 VDC	14.0 – 18.0 VDC / 28.0 – 26.0 VDC
Charge control	3 stage with manual equalize	3 stage with manual equalize
Charge temperature compensation	Automatic with sensor	Automatic with sensor
Efficiency	>80%	>80%
AC input power factor (charger on)	0.99	0.99
Input AC voltage range	90 – 135 VAC	90 – 135 VAC

General Specifications

Compatible battery types	Flooded / gel	Flooded / gel
Transfer relay rating 30 A	30 A	
Transfer time (AC to inverter and inverter to AC)	20 ms typical	20 ms typical
Storage temperature range	-22°F – 158°F (-30°C – 70°C)	-22°F – 158°F (-30°C – 70°C)
Operating temperature range	32°F – 140°F (0°C – 60°C)	32°F – 140°F (0°C – 60°C)
Dimensions (H x W x D)	5.5 x 15.0 x 20.0" (140 x 381 x 508 mm)	7.0 x 15.0 x 20.0" (178 x 381 x 508 mm)
Weight	32.0 lb (14.5 kg)	32.0 lb (14.5 kg)
Warranty	Two years	Two years
Part numbers	805-3025 (12 V w/standard remote)	805-3030 (12 V w/ACS remote)
	805-3026 (24 V w/standard remote)	805-3031 (24 V w/ACS remote)
	808-3026 (DC wiring box)	808-3026 (DC wiring box)
	808-3027 (GFCI option)	808-3027 (GFCI option)
	808-3025 (ACS remote display - optional)	808-2035 (ACS remote display)

Regulatory Approvals

CSA/NRTL approved to CSA 107.1, UL 458 and UL 1741, FCC Class A

Note: Specifications subject to change without notice.