

Powered by



MSJ 260 ▶ 2V 260Ah

MSJ 260 is a long service life battery up to 20 years expected life under normal float charge. As with all CSB batteries, all are rechargeable, highly efficient, leak proof and maintenance free.



► Specification

Cells Per Unit	1
Voltage Per Unit	2
Capacity	260Ah @ 10hr-rate to 1.80V per cell @25 °C (77°F)
Weight	Approx. 17.5 kg(38.58 lbs)
Maximum Discharge Current	1560A(5sec)
Internal Resistance	Approx. 0.36 mΩ
Operating Temperature Range	Discharge: -20°C~50°C(-4°F~122°F) Charge: 0°C~40°C(32°F~104°F) Storage: -20°C~40°C(-4°F~104°F)
Nominal Operating Temperature Range	25°C±3°C(77°F±5°F)
Float Charging Voltage	2.23±0.02/Cell at 25 °C(77°F) Temp. Coefficient ±3.3mV/°C(±1.8mV/°F)
Recommended Maximum Charging Current Limit	78A
Equalization / Cycle Use Charging Voltage	2.35V Temps coefficient ±3.3mV/°C(±1.8mV/°F)
Terminal	Pb-Ca-Sn Alloy (Recessed Terminal)
Container Material	The container and cover are made of flame retardant plastics which meet ABS(UL 94-V0/File E88637) specifications. The oxygen index level is higher than 28



MH14533(N)



No.:041005117




CSB-manufactured VRLA batteries are UL-recognized components under UL924 and UL1989.

CSB is also certified by ISO 9001 and ISO 14001.

► Dimensions :

Unit: mm (inch)

Overall Height (H)	Container height (h)	Length (L)	Width (W)
339±3 (13.36±0.12)	331±3 (13.03±0.12)	170±3 (6.69±0.12)	131±3 (5.16±0.12)

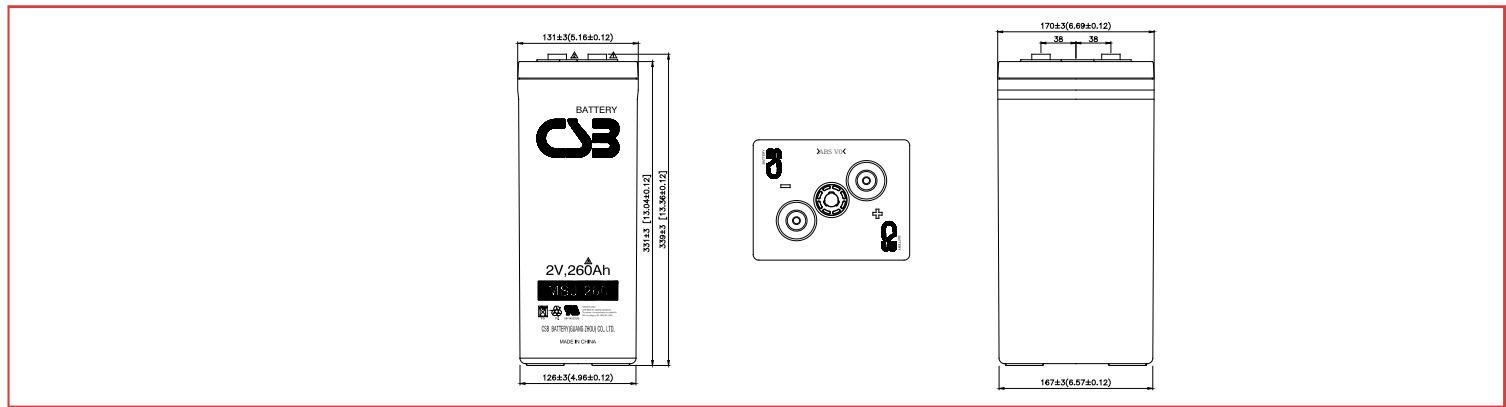


Constant Current Discharge Characteristics Unit:A (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	397	263	162	96.0	72.0	57.0	48.0	42.0	34.0	29.0
1.67V	378	253	154	93.0	68.0	55.0	46.0	41.0	33.0	28.0
1.70V	353	238	152	91.0	67.0	54.0	45.0	40.0	32.0	27.0
1.75V	313	212	140	86.0	63.0	52.0	43.0	38.0	31.0	26.0
1.80V	269	195	132	83.0	61.0	51.0	42.0	37.0	30.0	25.0
1.83V	228	176	122	78.0	58.0	47.0	40.0	35.0	28.0	24.0


Constant Power Discharge Characteristics Unit:W (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	695	468	288	173	130	104	88.0	78.0	63.0	53.0
1.67V	688	466	287	172	128	103	87.0	77.0	62.0	52.0
1.70V	633	433	278	168	126	102	86.0	76.0	61.0	51.0
1.75V	570	391	260	161	121	98.0	83.0	73.0	59.0	50.0
1.80V	490	360	245	154	116	96.0	81.0	71.0	58.0	49.0
1.83V	414	324	226	145	111	88.0	77.0	68.0	55.0	48.0


Expected Life V.S Operating Temperature

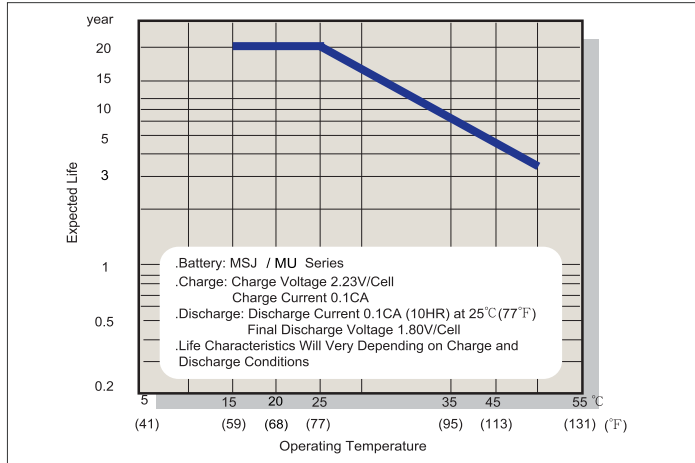


Typical Constant Voltage Charge Characteristics

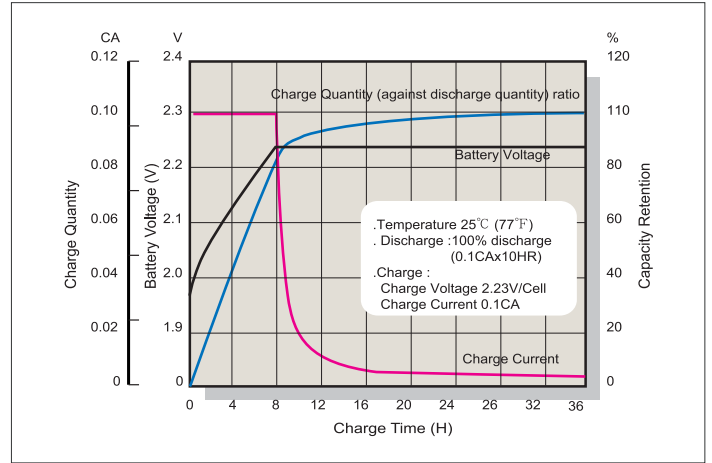


Capacity Retention Characteristics

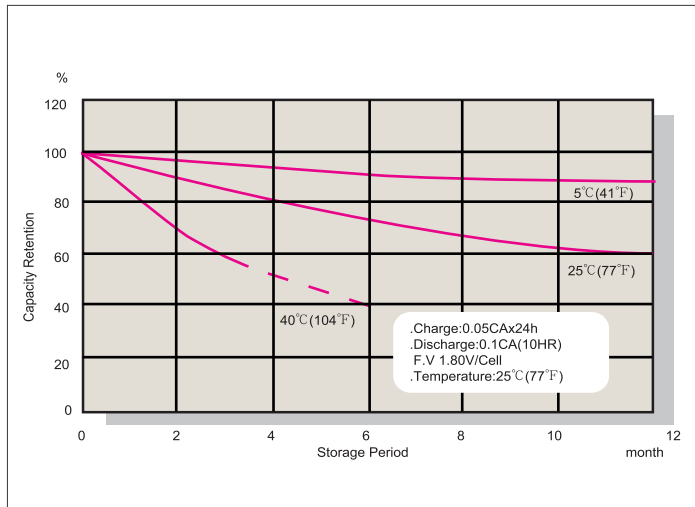


Discharge Characteristics

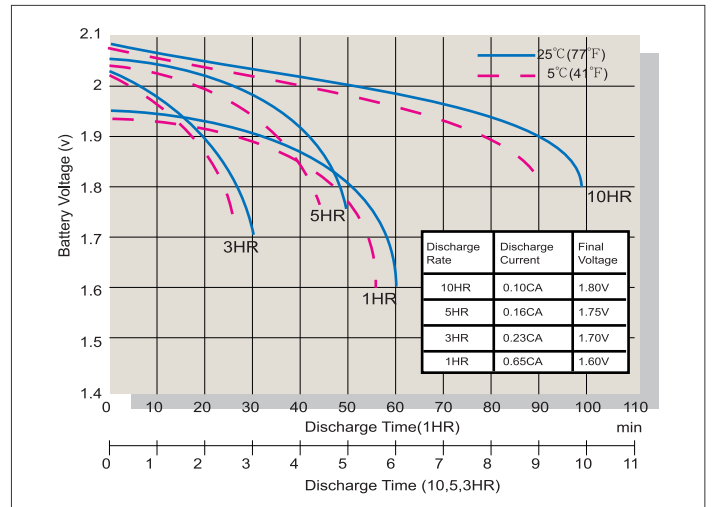

Oxygen Recombination Efficiency Chart

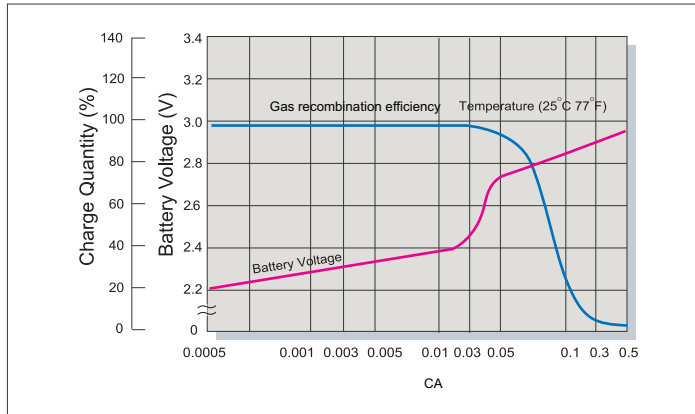

Terminal Voltage (V) and Discharge Time 25°C (77°F)

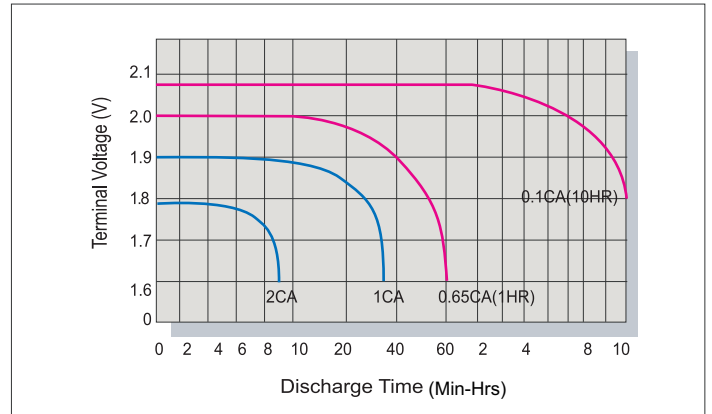

Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Standby	25°C (77°F)	2.23	2.21~2.25	0.3C

Discharge Current VS. Discharge Voltage

Discharge Current (A)	Final Discharge Voltage (V/Cell)
0.05C > A	1.90
0.15C > A ≥ 0.05C	1.80
0.20C > A ≥ 0.15C	1.75
0.40C > A ≥ 0.20C	1.70
A > 0.40C	1.60

Sales Office URL: WWW.CSB-BATTERY.COM

GLOBAL HQ
CSB BATTERY CO., LTD. (TAIWAN)
 Tel : +886-2-2555-5600
 Fax : +886-2-2555-3300
 mail : service@csb-battery.com.tw

BEIJING OFFICE. (CHINA)
CSB BATTERY TECHNOLOGIES (BEIJING) CO., LTD.
 Tel : +86-10-59621300/1301/1302/1303
 Fax : +86-10-59621304
 mail : chinasl@csb-battery.com

AMERICA HQ
CSB BATTERY TECHNOLOGIES INC. (U.S.A)
 Tel : +1-817-244-7777/1-(800)3-CSB-USA(272872)
 Fax : +1-817-244-4445
 mail : csb@csb-battery.com

SHANGHAI OFFICE. (CHINA)
CSB BATTERY LOGISTIC (SHANGHAI) CO., LTD.
 Tel : +86-21-5046-1622/5046-0833
 Fax : +86-21-5064-3314
 mail : chinasl@csb-battery.com

EUROPE HQ
CSB Battery Europe BV.
 Tel : +31(0)-180-418-140
 Fax : +886-2-2555-3300
 mail : eurosales@csb-battery.eu

SHENZHEN OFFICE. (CHINA)
CSB BATTERY LOGISTIC (SHANGHAI) CO., LTD.
 Tel : +86-755-8831-6488/6396/6356
 Fax : +86-755-8831-6548
 mail : she@csb-battery.com.cn